

4"/6" Metal Trim Surface Mount Light with Motion Sensor - White

Project Name:	Order Number:	Prepare by:	Note:	Date:	Type:

METAL TRIM SURFACE MOUNT


This **MRSMMMS** Series elegant design product can provide exceptional performance in general lighting application for home, hotel, motel and commercial properties, and can also serve as a cost effective temporary lighting solution. Precision engineered optical stack creates uniform light distribution that maximizes lumen output. Smooth dimming feature and compatible with a wide variety of dimmers.

Perfect use for residential housings, condominiums, business building, hotel and hospitality industry.




MOTION SENSOR

- High Sensitive Microwave Sensor for 15ft

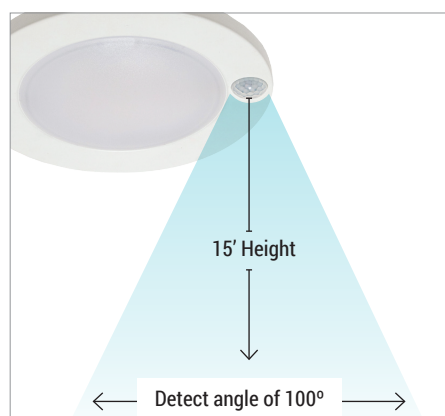

Automatically turn the light ON at dusk when movement is detected and OFF at dawn.

DIMENSION

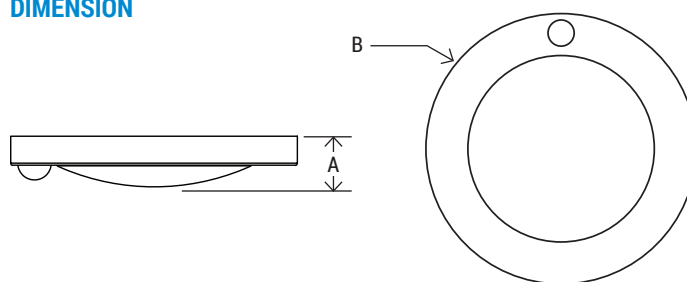

MODEL#	HEIGHT	DIAMETER
MRSMMS410-30K-WH	1.22"	6.73"
MRSMMS614-30K-WH	1.38"	7.72"

TECHNICAL SUMMARY

MODEL #	LUMENS	WATTS	EFFICACY	CRI	VOLTAGE	BEAM°	CCT	PF	LIFE	OPERATING TEMP.
MRSMMS410-30K-WH	650	10W	65 lm/W	90	120V-60 Hz	110°	3000K	>0.9	50,000 hrs	-5°F ~ 104°F
MRSMMS614-30K-WH	1000	14W	71 lm/W							

PART NUMBER ORDERING SUMMARY

I	M	R	SM	MS	6	14	-	30K	-	WH
IUS	M Mfg	R Round	SM Surface Mount	MS Motion Sensor	4"/6" Aperture	10/14 Wattage		30K 3000K		WH White

**4"/6"** Metal Trim Surface Mount Light with Motion Sensor - White

Project Name:	Order Number:	Prepare by:	Note:	Date:	Type:

CONSTRUCTION

- Unit includes die-cast metal housing, LED array, heat sink, lens, and metal trim.

OPTICS

- High quality PC lens
- Efficiency LED array
- Diffuse for uniform illumination

DRIVER

- High efficiency integral 120V 60Hz constant current dimmable driver.
- Smooth flicker free deep dimming to 10%

MOUNTING



- Surface mount on junction box
- Surface mounting bracket included

LISTING

ETL Listed, Energy Star Listed, Suitable for Wet Locations, Title 24 JA8-2022, RoHS

WARRANTY

5 years manufacturer warranty, consult factory for more details. Terms and conditions may apply.

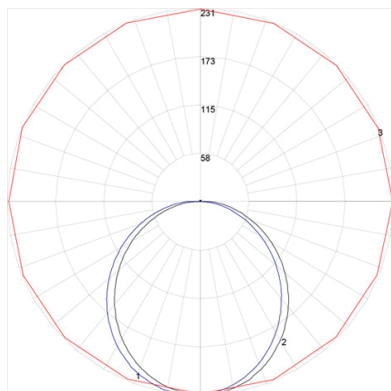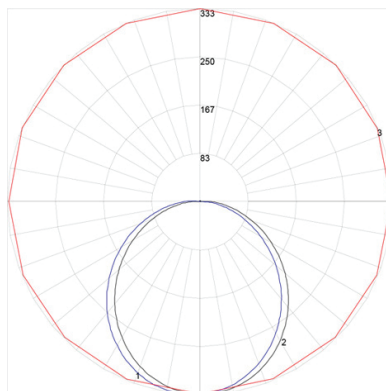PHOTOMETRY**MRSMS410-30K-WH****MRSMS614-30K-WH****RECOMMENDED DIMMERS****LUTRON**

- TGCL-153PH-WH
- DVCL-153PR
- P-PKG1W-WH-R
- CTCL-153PDH-WH

LEVITON

- R00-RNL06-TW
- R50-IPL06-10M

