

## 4' LED Commercial Vaportight with Wattage and CCT Selector

| Project Name: | Order Number: | Prepare by: | Note: | Date: | Type: |
|---------------|---------------|-------------|-------|-------|-------|
|               |               |             |       |       |       |

**34-38-45 WATTS**

The **IMVP4FT-34-38-45W-3CCT** series

This Vapor Tight Fixtures are designed to save energy and meet low light egress requirements. It's optimal for underground parking garage compliance. Also, it's perfect for using as utility lighting, parking garage and stairwell lighting where meets applicable building and safety codes. These fixtures are DLC and UL certified. They are popular in parking lot, warehouse, public area and other commercial area.




Select color temperature from

- 3500K **NATURAL WHITE**
- 4000K **COOL WHITE**
- 5000K **DAYLIGHT**



### DIMENSION

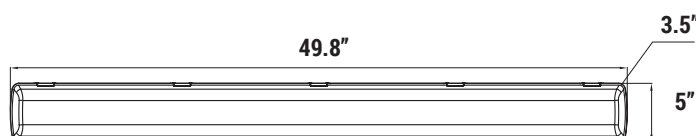

### TECHNICAL SUMMARY

| LUMENS               | WATTS             | EFFICACY | CRI | VOLTAGE       | BEAM ° | CCT                     | PF   | LIFE        | OPERATING TEMP. |
|----------------------|-------------------|----------|-----|---------------|--------|-------------------------|------|-------------|-----------------|
| 4420<br>4940<br>5850 | 34W<br>38W<br>45W | 130 lm/W | 80  | 120V,<br>277V | 140    | 3500K<br>4000K<br>5000K | >0.9 | 100,000 hrs | -40°F ~ 104°F   |

### PART NUMBER ORDERING SUMMARY

**I MVP4FT-34-38-45W-3CCT**



## 4' LED Commercial Vaportight with Wattage and CCT Selector

| Project Name: | Order Number: | Prepare by: | Note: | Date: | Type: |
|---------------|---------------|-------------|-------|-------|-------|
|               |               |             |       |       |       |

### CONSTRUCTION

- Unit includes heavy duty plastic frame, LED array, heat sink, and lens.
- High quality PC lens.
- Efficiency LED array.
- Diffuse for uniform illumination.
- CRI 80+

### DRIVER

- 120-277V universal input voltage.
- 0-10V smooth flicker free dimmable.

### MOUNTING

- Pendant Mount with V-Hook
- Surface mounting

### LISTING

- DLC Listed
- UL 1598 suitable for wet locations
- UL 8750 LED equipment in Lighting Products

### WARRANTY

5 years manufacturer warranty

\* Terms and conditions may apply.

\*5 years limited LED luminaire warranty to the original purchaser that the luminaire shall be free from defects in materials and workmanship from date of shipment, when under properly installed at normal conditions of use. The warranty may not cover physical damage or abuse under certain conditions.

### ACCESSORIES (SOLD SEPARATELY)



#### MHV-8W-EM

- Input Voltage 120-277V
- 8W Output
- Output Voltage 150-200Vdc



#### MHV-25W-EM

- Input Voltage 120-347V
- 25W Output
- Output Voltage  $\leq 175Vdc$

### OCCUPANCY SENSORS (SOLD SEPARATELY)



#### MBRI819-B-O

120-277v On/off Passive  
Infrared Occupancy Sensor



#### MBRI819-B-D

Bi-level passive infrared  
Occupancy sensor