

POST TOP LIGHT

TYPE:













The post top provides a unique, scalable lighting solution targeted for 8' to 20' mounting heights. Its design brings proportion to parking lots, drive lanes, entrances, building perimeters and pathways. The excellent optical design that deliver the smooth light with a very good uniformity. The structure is clean and more popular, promotes harmony between the outdoor lighting and architecture.

SPECIFICATION FEATURES

Construction

- Rugged die-cast aluminum housing secures the thermally conductive LED panel and electrical cha.
- Show off urban style by the simple shape and the solid material.
- Housing is completely sealed against moisture and environmental contaminants.

Optics

- Light engines are available in adjustable color temperature (3000K&4000K&5000K) configurations.
- Scalable Lumen Packages from up to 17,200 Lumens.
- High performance UV stabilized optical grade polymer optic lenses to achieve desired distribution optimized to get target lumens and a superior lighting uniformity.
- The optics can conform to dark sky requirement.

Electrical

- Universal 120-277 VAC or 347-480 VAC input voltage.
- Standard with 0-10V dimming allowing for 10% to 100% dimming.
- The 130W optional for 4 positions wattage regulation: 130W, 87W, 70W, 45W.
- THD: ≤20%
- Power Factor: ≥90%

Controls

- Optional occupancy sensor.
- Optional Photocell.

Ambient Temperature

• Ambient operating temperature -40°C to 45°C (-40°F to 113°F).

Lifespan

• Estimated 100,000-hour LED lifespan based on IES LM-80 results and TM-21 calculations.


Warranty

• Five-year warranty.

Certifications

- UL cUL wet location listed.
- DesignLights Consortium™ Qualified. Note: Please refer to the DLC website for specific product qualifications at www.designlights.org.



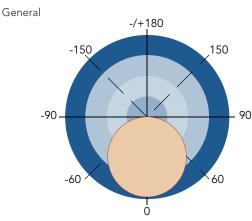

Finish

• It's available in black or optional dark bronze, silvery gray or white.




Note

• Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25°C(±5°C) specifications subject to change without notice.






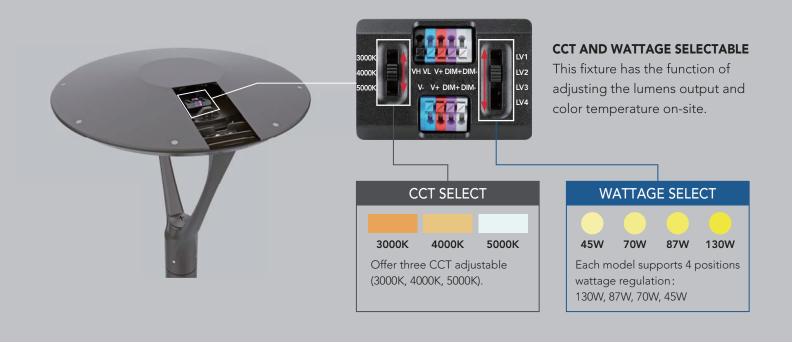


DIMENSION


unit: mm/inch

Net weight: 130W: 25.699lbs



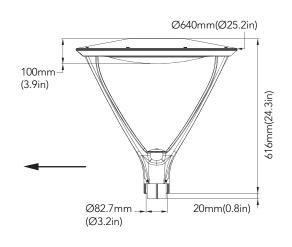

EPA OF POST TOP



ADJUSTABLE LUMEN OUTPUT TABLE

SWITCH SETTING	SETTING WATTS	VOLTAGE	CRI	LUMENS 3000 K	LPW 3000 K	LUMENS 4000 K	LPW 4000 K	LUMENS 5000 K	LPW 5000 K
LV1	130W	120-277 VAC	70	16000 lm	123 lm/W	17200 lm	132 lm/W	16300 lm	125 lm/W
LV2	87W	120-277 VAC	70	11600 lm	133 lm/W	12000 lm	138 lm/W	11800 lm	136 lm/W
LV3	70W	120-277 VAC	70	9700 lm	139 lm/W	10000 lm	143 lm/W	9900 lm	141 lm/W
LV4	45W	120-277 VAC	70	6500 lm	144 lm/W	6700 lm	149 lm/W	6600 lm	147 lm/W

ELECTRICAL DATA

NUMBER OF DRIVERS	DRIVER CURRENT (mA)	NOMINAL POW ER (W)	INPUT VOLTAGE (V)	CURRENT (Amps)	
		130	120	1.08	
2	3500	130	208	0.63	
2	3500	130	240	0.54	
		130	277	0.47	

ACCESSORIES (Optional)



PIR Motion Sensor, 120-277V

USE: Sensor can be pre-installed in factory or field installed.



Photocell - 120V-277V 347V/480V

USE: Photocell is field installed.

ORDERING GUIDE Example: IMPL01130W27VYYYYYY									
	FixtureType	Power Consumption	Voltage	ССТ	Finish	Photocell (Option)	Sensor (Option)	Photometry	Internal Code
IUS									
ı	MPL01 Post Top Light	130W	27V 120-277V	DDK Adjustable color temperature	D Dark Bronze B Black W White	P0 120-277V Photocell Blank Without Photocell	M With Motion Sensor Blank Without Sensor	Blank General Photometry	Blank Alphanumeric