



ILLUMINATING US
lighting



LED Edgelit Exit Sign



04-XEDU


ILLUMINATION

- Ultra-bright, energy efficient, long-lasting Red or Green LED
- UV-stabilized ultra-clear acrylic edgelit panel provided consistent, uniform illumination

WARRANTY

- Five Year Warranty on all electronics and housing. Batteries are pro-rated warranted for 5 years.

DIMENSIONS

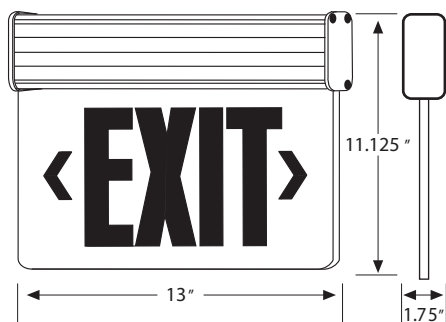

ORDERING INFORMATION

Model	Letter Color	Panel Color	Housing Color	Battery	Options	Face #
04-XEDU	R - Red G - Green	C - Clear M - Mirror (Silver Mylar) W - White (White Mylar)	W - White B - Black A - Anodized Aluminum	Blank - AC Only EM - NiCad Battery	SDT - Self Diagnostics 2C - Dual Circuit SW - Special Wording	1 - Single Face 2 - Double Face

FEATURES

- Energy efficient LED technology
- Decals & template provided for chevron directional indicators
- UL listed for damp locations & meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes

MOUNTING

- Die-cast aluminum mounting canopy included—provides top, end or back mount convenience

OPTIONS

- SDT: Self-Diagnostic (option SDT) continually diagnoses units performance and tests system (auto battery discharge once every 30 days and once every 2 months) to ensure reliable operation and to meet electrical and life safety codes.
- DC: Dual Circuit option on the AC-only unit enables it to be connected to (2) different (primary & secondary, (1) acting as a back-up for the other) supplies at the same time.
- Edgelit EXIT panels available to order separately.
- Double face utilizes a silver or white mylar insert.

ELECTRICAL

- Dual 120V/277V voltage
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- LVD (low voltage disconnect) prevents battery from deep discharge
- (1) Maintenance-free, rechargeable 4.8V 500mAh Ni-Cad battery (EM Model)
- Internal solid-state transfer switch automatically connects the internal battery to LED Board for minimum 90-minute emergency illumination
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

HOUSING

- Premium-grade, extruded aluminum housing (also available in black or white powder coated)

Job Information: Type:

Job Name:

Catalog #: