



ILLUMINATING US
lighting

Type: _____



R580 Transparent

Features

- Diameter 580mm
- Modern, stylish and Innovative design
- Uniform light output
- White/Black/Silver finishing available
- Durable with life span over 50,000 hours
- 5 Years Guarantee
- Simple and convenient installation

Applications

Meets the general and decoration lighting environment such as:

- Offices
- Restaurants
- Hotels
- Shops
- Schools and Hospitals
- Hallway & lobbies
- Meeting Rooms


Sheenly LED Round Panel Light

Sheenly transparent LED Round Panel Light adopts qualified super bright LED as light source, which is stable, long life and no UV & IR emission. The anodized aluminum frame is stylish and fashionable with everlasting color. It is powered by low voltage constant current driver, which is safety, energy saving and long life.

It is the ideal replacement for traditional grid lights and fluorescent tubes. Moreover, Sheenly Panel light creates extremely harmonies and uniform lights, which conventional light never achieved.

Specifications

Dimension	D580*15 mm
Power & Lumen Output	
40W	4680 lm @ 4000K
60W	7020 lm @ 4000K
Color Temperature	
Warm White	3000 ±200K
Natural White	4000 ±250K
Pure White	5700 ±350K
Color Rendering Index	>80
Rated Life (L70)	50,000 Hours
Housing	Aluminum
Beam Spread	Transparent
Operating Temperature	-20 °C to +45 °C (Amb.)
Input Voltage	200-240V /AC
Power Factor	>0.95
Working Voltage	
40W	25 V/DC
60W	38 V/DC
Working Current	
40W	1050mA
60W	1400mA
Net Weight	3.15 Kg
Glow Wire	650 °C (850 °C Optional)
IP	IP40
IK	IK05
Installation	Suspension





lighting

IP40



Dimension and Illumination Diagram

Inch [mm]

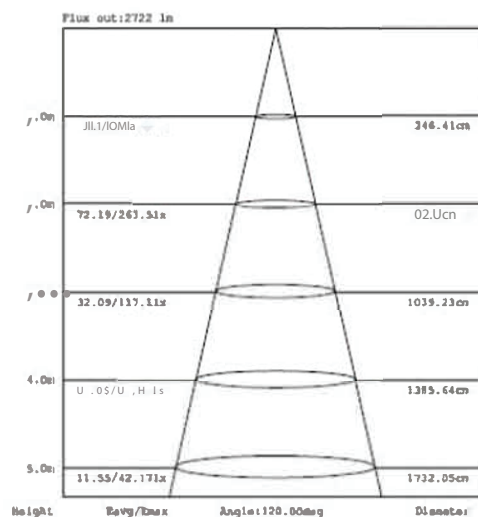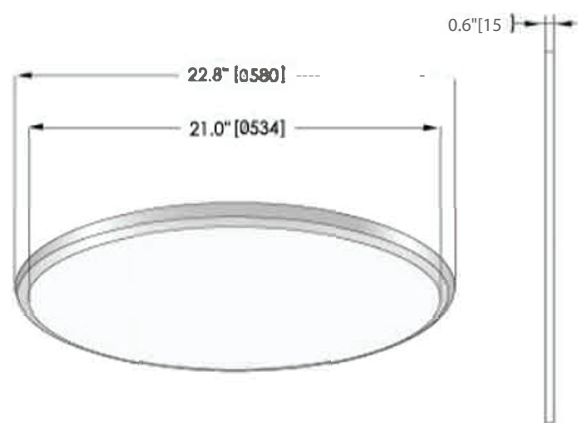


Ordering Information

Sheenly	Class	Watt	CCT	Model	Finishing	Options
SL=Sheenly Lighting	PAN=Panel	40W 60W	WW=3000 ± 200K NW=4000 ±250K PW=5700 ±350K	R60	BK=Black WH=White	UD=Up/Down Lighting TP=Transparent

*Standard finishing comes in White, for other finishing color please specify when place the order.

Part Number	Power	CCT	Lumen Output	Beam	Dimension
SL-PAN-40W-WW-R60-UD-TP	40W	3000K/4000K/5700K	4680	transparent	D580*15 mm
SL-PAN-40W-NW-R60-UD-TP	40W	3000K/4000K/5700K	4680	transparent	D580*15 mm
SL-PAN-40W-PW-R60-UD-TP	40W	3000K/4000K/5700K	4680	transparent	D580*15 mm
SL-PAN-60W-WW-R60-UD-TP	60W	3000K/4000K/5700K	7020	transparent	D580*15 mm
SL-PAN-60W-NW-R60-UD-TP	60W	3000K/4000K/5700K	7020	transparent	D580*15mm
SL-PAN-60W-PW-R60-UD-TP	60W	3000K/4000K/5700K	7020	transparent	D580*15mm

Accessory




Suspension Kit:
Round Driver Box, Steel Cables, Screws, etc.




LED Round Panel Light RS80

- Round Driver Box


Step 1

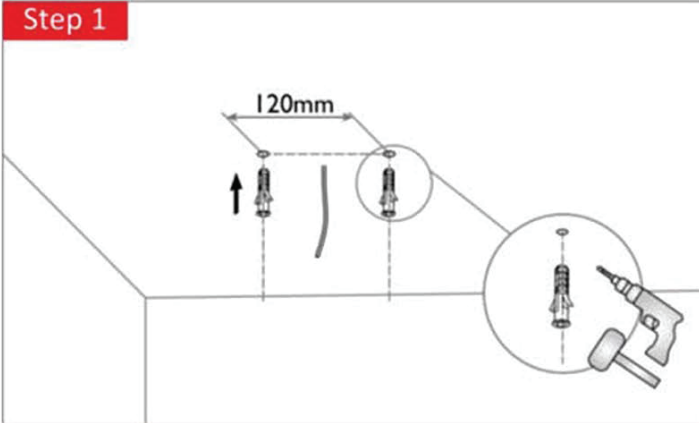


Step 2

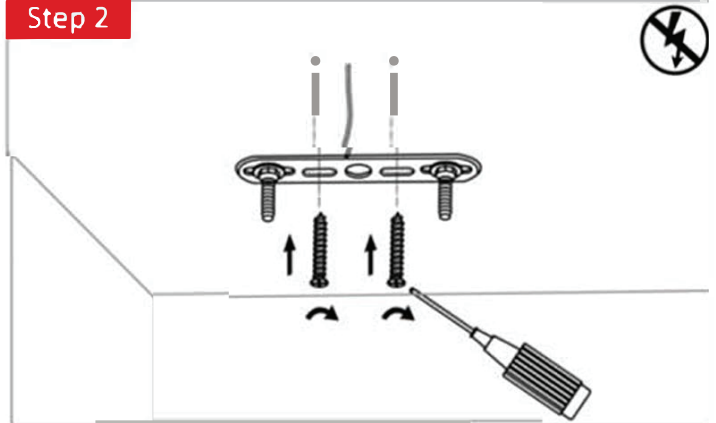


Step 3

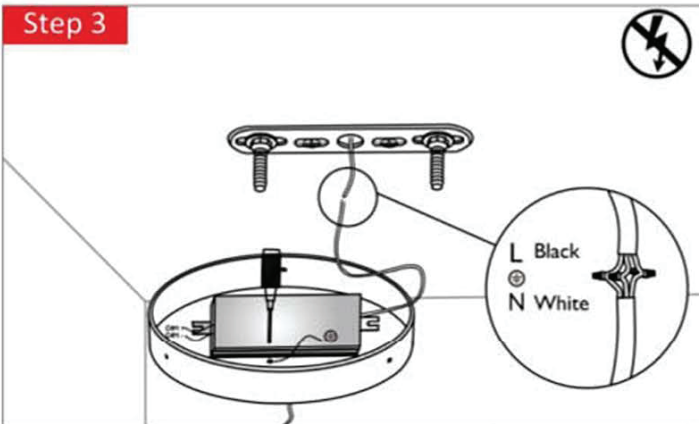


Step 4

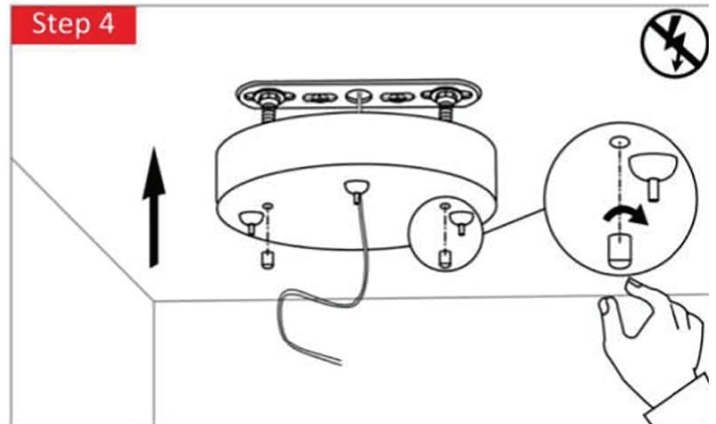

Step 5

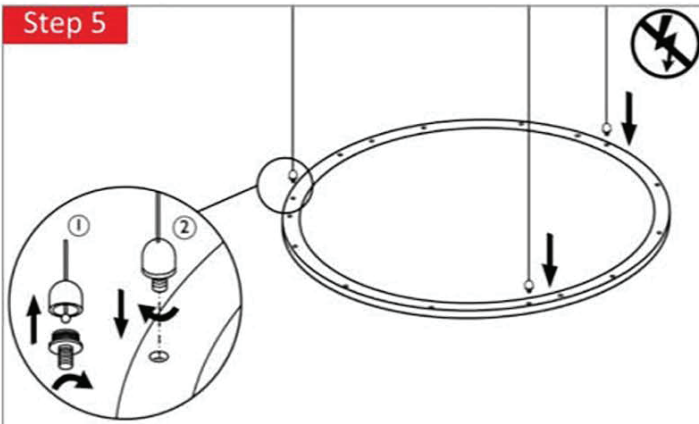

Step 6

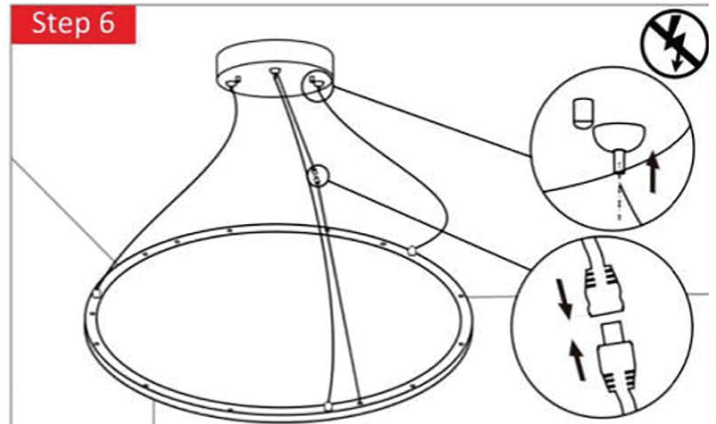


Step 7




LED Round Panel Light RS80

- Round Driver Box


Step 1

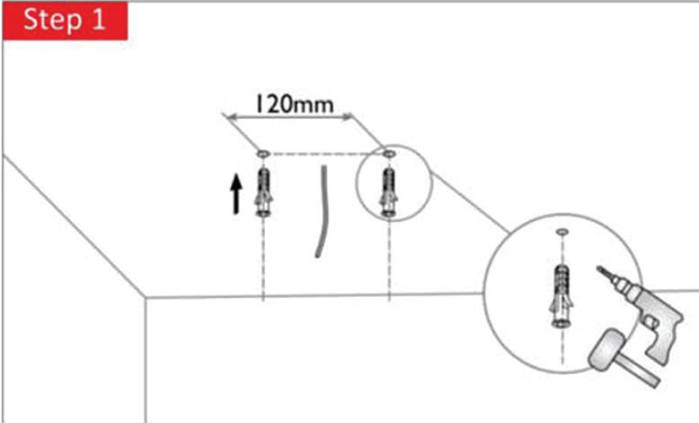


Step 2

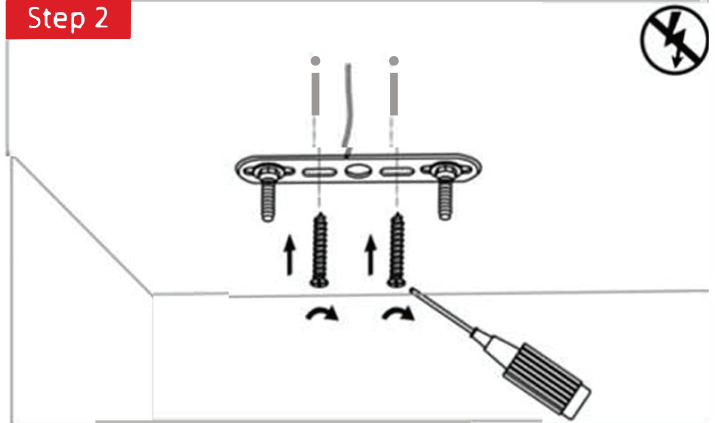


Step 3

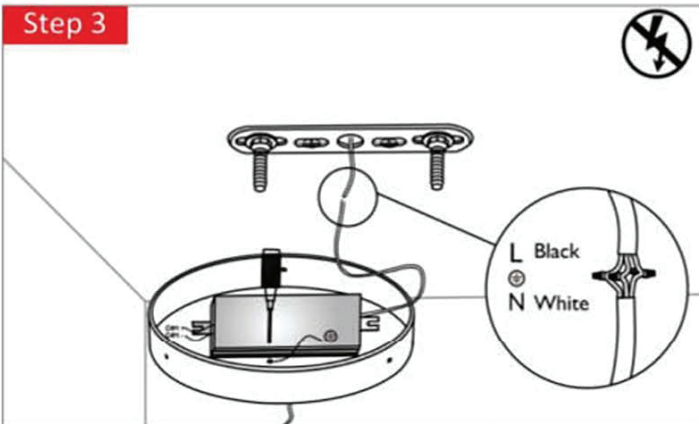


Step 4

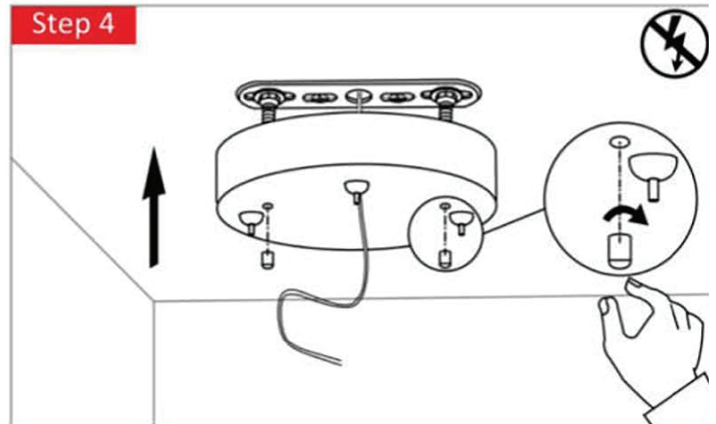

Step 5

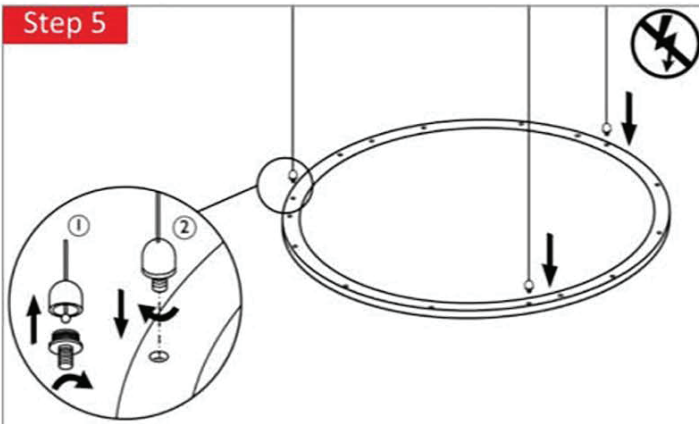

Step 6

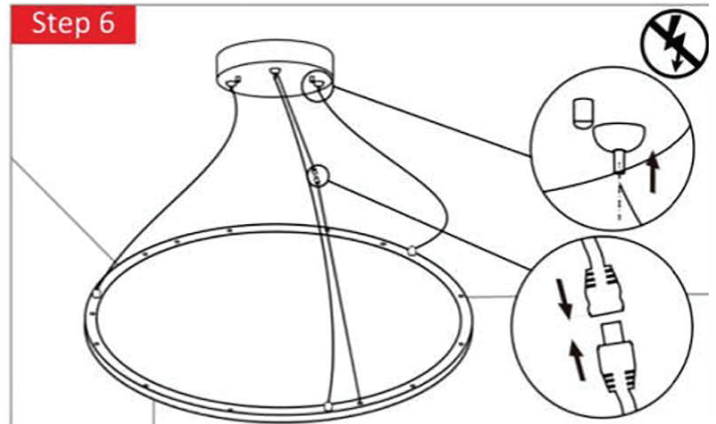

Step 7



Lighting Up
a New World