

SQUARE STRINGER

F1 / F2



-  Anti-impact
-  IP65
-  Recycle
-  Injection molding cord, strong tensile strength
-  Smaller size, only 1/2 of the conventional luminaire


-  Long Life 10 years OK
-  120VAC 60Hz
-  CRI ≥80
-  Dimmable OK
-  IP65
-  5 years warranty
-  LED PHILIPS 2835
-  LM80
-  ETL
-  FCC



SPECIFICATIONS


ITEM #	INPUT VOLT.	WATT	LUMEN EFFICIACY	LM@5000 K ± 5%	CRI	DIMMABLE	WATER PROOF	WIRE SIZE	LENGTH	PLASTIC COVERS
BWSTL-F1-5-D	AC 120V	100 W	125LM/W	12500LM	80	NO	IP65	SJTW 18/3 AWG SJTW 16/3 AWG	50ft	Optional
BWSTL-F1-10-D	AC 120V	200 W	125LM/W	25000LM	80	NO	IP65	SJTW 18/3 AWG SJTW 16/3 AWG	100ft	Optional
BWSTL-F2-5-D	AC 120V	125 W	125LM/W	16000LM	80	NO	IP65	SJTW 18/3 AWG SJTW 16/3 AWG	50ft	Optional
BWSTL-F2-10-D	AC 120V	250 W	125LM/W	32000LM	80	NO	IP65	SJTW 18/3 AWG SJTW 16/3 AWG	100ft	Optional

DIMENSIONS

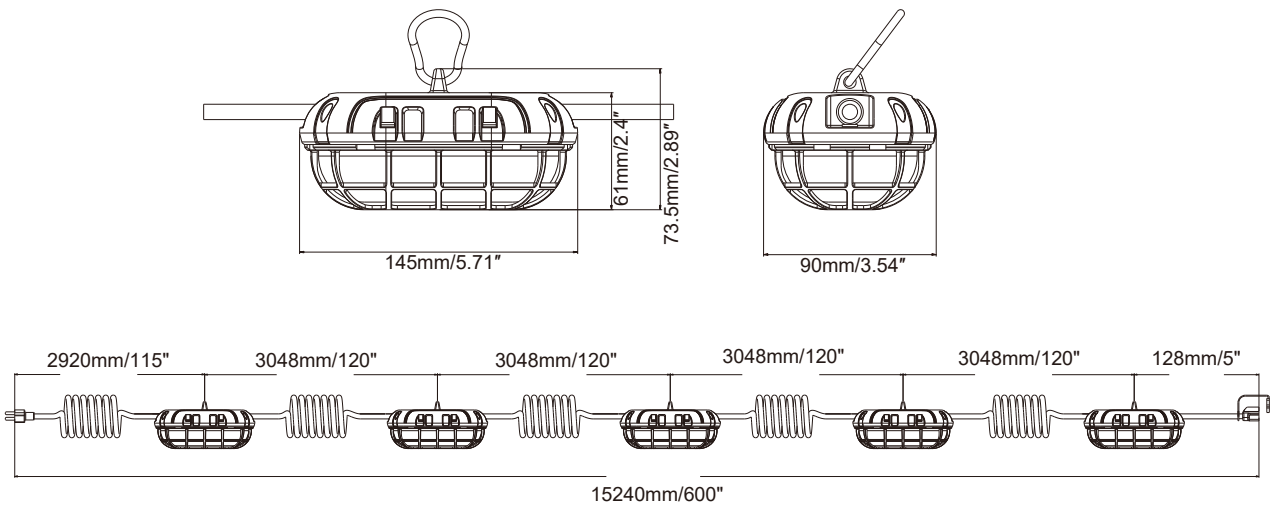


LINKABLE UNITS

BWSTL-F1-5 BWSTL-F2-5 5 lamps one set

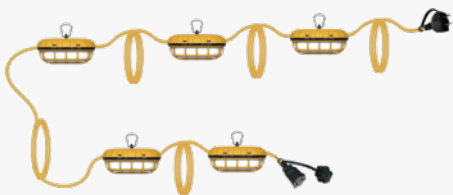

100W Maximum link 4 sets(18 AWG), 7 sets(16 AWG)
125W Maximum link 3 sets(18 AWG), 6 sets(16 AWG)

BWSTL-F1-10 BWSTL-F2-10 10 lamps one set


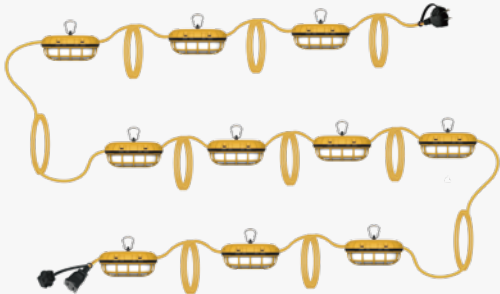


200W Maximum link 2 sets(18 AWG), 4 sets(16 AWG)
250W Maximum link 2 sets(18 AWG), 3 sets(16 AWG)

LENGTH

5 lamps one set (Standard)	L=50ft (15m)	10 lamps one set (Standard)	L=100ft (30m)
15 lamps one set	L=150ft (46m)	25 lamps one set	L=250ft (76m)
20 lamps one set	L=200ft (61m)	30 lamps one set	L=300ft (91m)

FEATURES

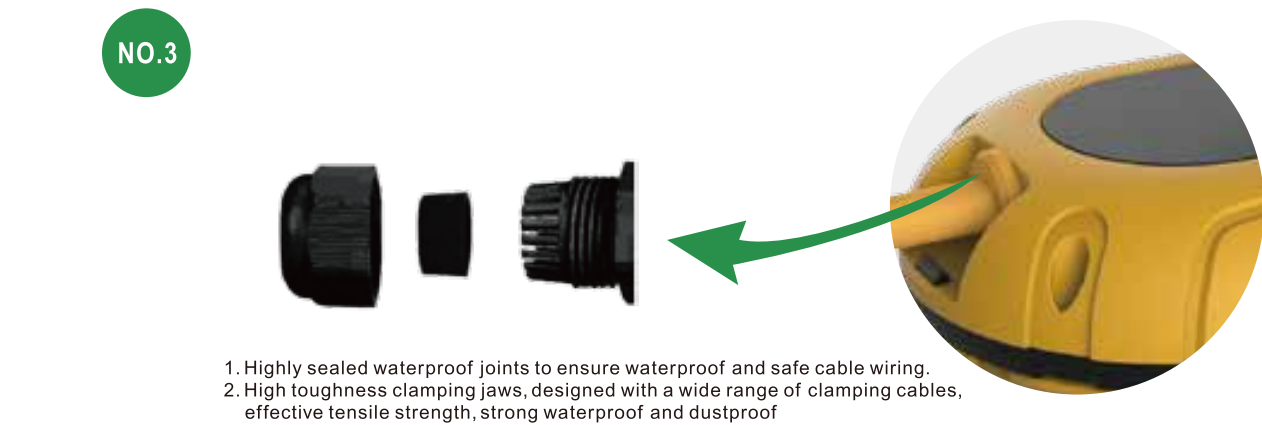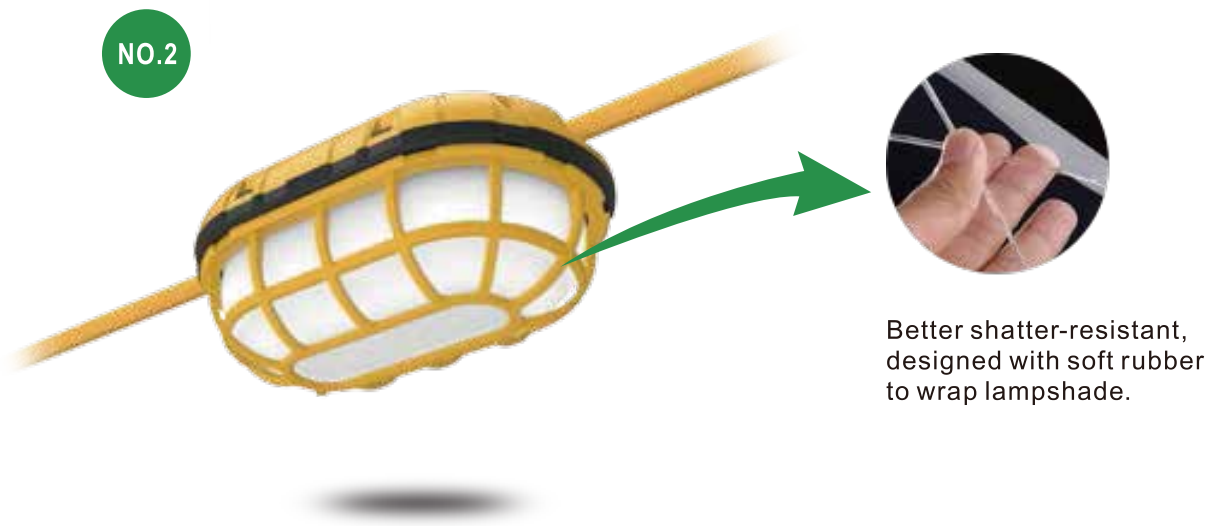

PACKING INFO

Watt	Inner Box/CM	Master Ctn/CM	L	W	H	CBM/Ctn	Pcs/Ctn	20GP Qty	40HQ Qty
100/125	23*23*27	47.6*47.6*29	0.476	0.476	0.29	0.066	4	1572	4000
200/250	46*23*27	47.6*47.6*29	0.476	0.476	0.29	0.066	2	786	2000

APPLICATIONS



ILLUMINATING US, LLC

813 W Elgin St Broken Arrow, OK 74012

TEL: 918-804-7618 E-mail: Info@illuminatingus.com

CATALOG NUMBER BREAKDOWN

BWSTL-F1-X-X

BW	STL	F1	X	X
Company Name	Product Info	Series	Lamp Qty	
Bestwon	String Light	F1=F1 F2=F2	5=5 lamps 10=10 lamps	Any number Word or Phrase