


2' LED VANITY LIGHT Round

Project Name:	Order Number:	Prepare by:	Note:	Date:	Type:


This LED Vanity Light offers a modern and streamlined look for your living space. It's designed to be mounted Horizontally or vertically easily. With the powder coated painted die-formed cold-rolled steel frame and high transmission white acrylic lens, this energy-efficient product will illuminate your home for a very long period.

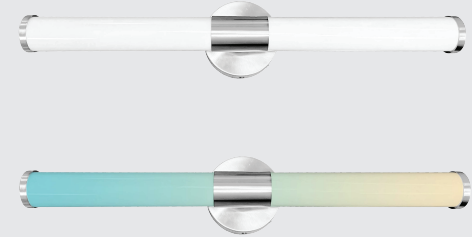

DIMENSION



- Select color temperature from
- 3000K **NATURAL WHITE**
 - 4000K **COOL WHITE**
 - 5000K **DAYLIGHT**

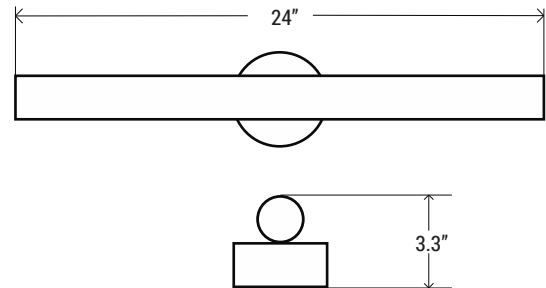

TECHNICAL SUMMARY

MODEL #	LUMENS	WATTS	EFFICACY	CRI	VOLTAGE	DIMMING	CCT	PF	LIFE	OPERATING TEMP.
MWVLR2FT25W-3CCT-BN	1750	25W	70lm/W	80	120V, 60 Hz	Smooth dim to 10%	30K/40K/50K	>0.9	50,000 hrs	-40°F ~ 104°F

PART NUMBER ORDERING SUMMARY

I MW VLR 2FT 25W-3CCT-BN

IUS	MW Mfg	VLR Vanity Light round	2FT 2'	25W Wattage	3CCT 30K/40K/50K	BN Brushed Nickel
-----	-----------	---------------------------	-----------	----------------	---------------------	----------------------



2'

LED VANITY LIGHT Round

Project Name:	Order Number:	Prepare by:	Note:	Date:	Type:

CONSTRUCTION

- Unit includes steel frame, LED array, heat sink, lens
- Die-formed cold-rolled steel with powder coated paint

OPTICS

- High transmission white acrylic lens with satin nickel trim
- Efficiency LED array
- Diffuse for uniform illumination

DRIVER

- 120V 60Hz input voltage
- Smooth flicker free deep dimming

MOUNTING

- Surface mount on junction box

LISTING

UL Listed, Energy Star Listed, Suitable for Wet Locations,
Title 24 JA8-2022, RoHS

WARRANTY

2 years manufacturer warranty, consult factory for more details.
Terms and conditions may apply.

RECOMMENDED DIMMERS

LUTRON

- TGCL-153PH-WH
- DVCL-153PR
- P-PKG1W-WH-R
- CTCL-153PDH-WH

LEVITON

- R00-RNL06-TW
- R50-IPL06-10M

